



US006890401B2

(12) **United States Patent**
Bernetich

(10) **Patent No.:** **US 6,890,401 B2**
(45) **Date of Patent:** **May 10, 2005**

(54) **LIQUID MOLDED HOLLOW CELL CORE
COMPOSITE ARTICLES**

(75) Inventor: **Karl R. Bernetich**, Wilmington, DE
(US)

(73) Assignee: **The Boeing Company**, Chicago, IL
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 273 days.

(21) Appl. No.: **10/021,153**

(22) Filed: **Oct. 30, 2001**

(65) **Prior Publication Data**

US 2003/0082339 A1 May 1, 2003

(51) **Int. Cl.**⁷ **C09J 5/02**

(52) **U.S. Cl.** **156/307.5; 156/307.7;**
156/307.3; 156/307.1; 156/290; 156/287;
156/286; 156/285; 156/90

(58) **Field of Search** 428/116, 73, 174,
428/304.4; 156/60, 90, 242, 285, 286, 287,
290, 307.1, 307.3, 307.5, 307.7

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,567,499	A	10/1996	Cundiff et al.
5,569,508	A	10/1996	Cundiff
5,851,336	A	12/1998	Cundiff et al.
5,897,739	A *	4/1999	Forster et al.
6,117,518	A *	9/2000	Cawse et al.
6,156,146	A	12/2000	Cundiff
6,440,521	B1 *	8/2002	Moore
2002/0069962	A1 *	6/2002	Maxwell et al.

* cited by examiner

Primary Examiner—Deborah Jones


Assistant Examiner—Wendy Boss



(74) *Attorney, Agent, or Firm*—David J. Clement

(57) **ABSTRACT**

A hollow core composite assembly **10** is provided, including a hollow core base **12** having at least one open core surface **14**, a bondable solid film **22** applied to the open core surface **14**, at least one dry face ply **30** laid up dry and placed on top of the solid film **22**, and a liquid resin **32** applied to the at least one dry face ply **30** and then cured.

7 Claims, 3 Drawing Sheets

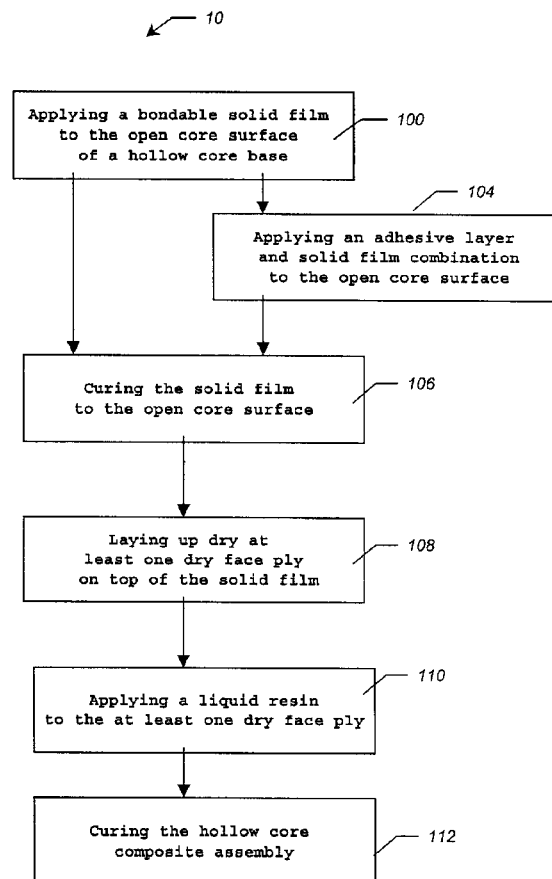

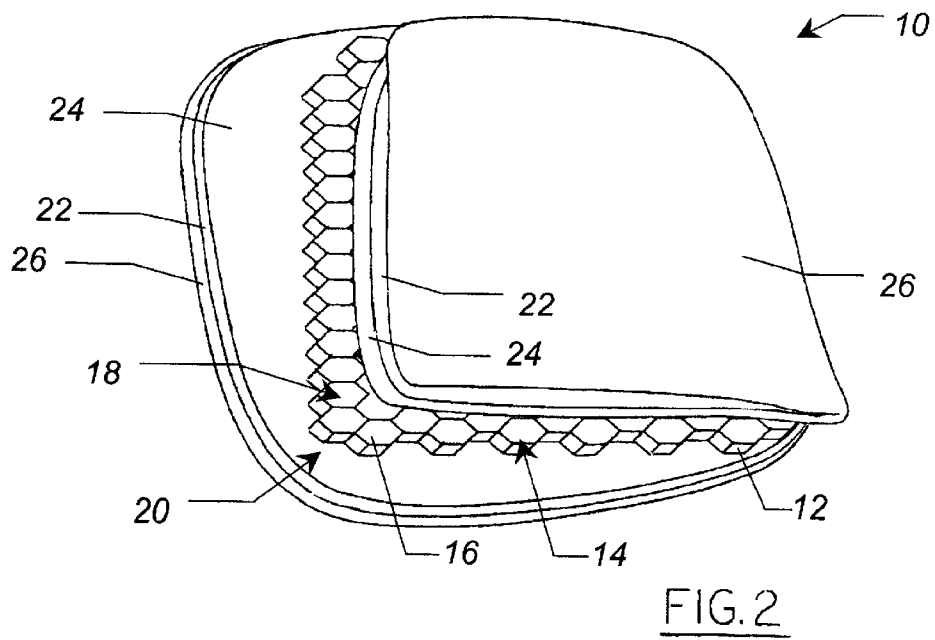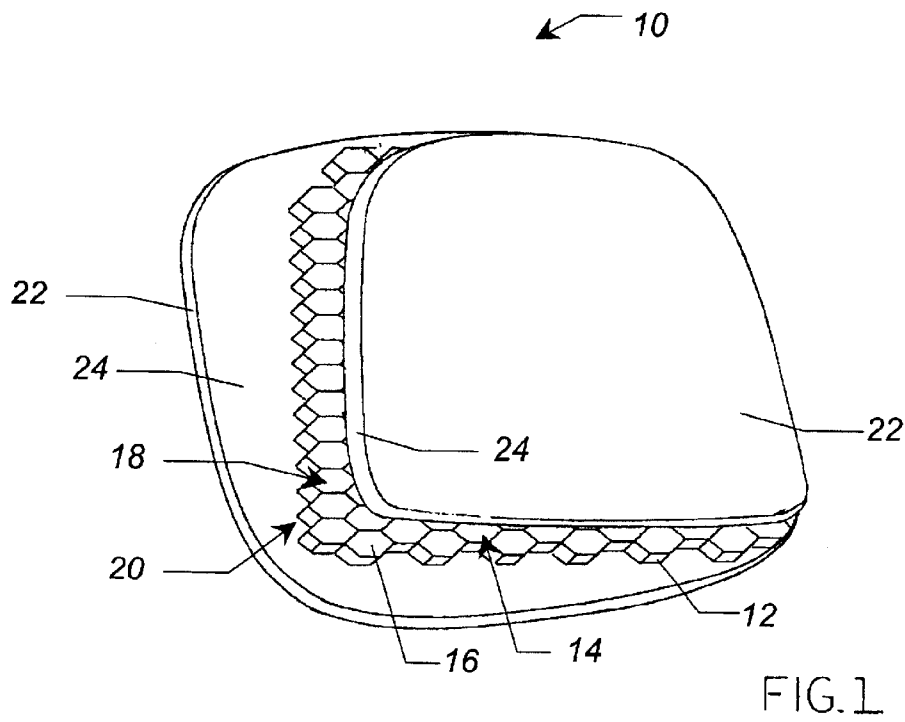

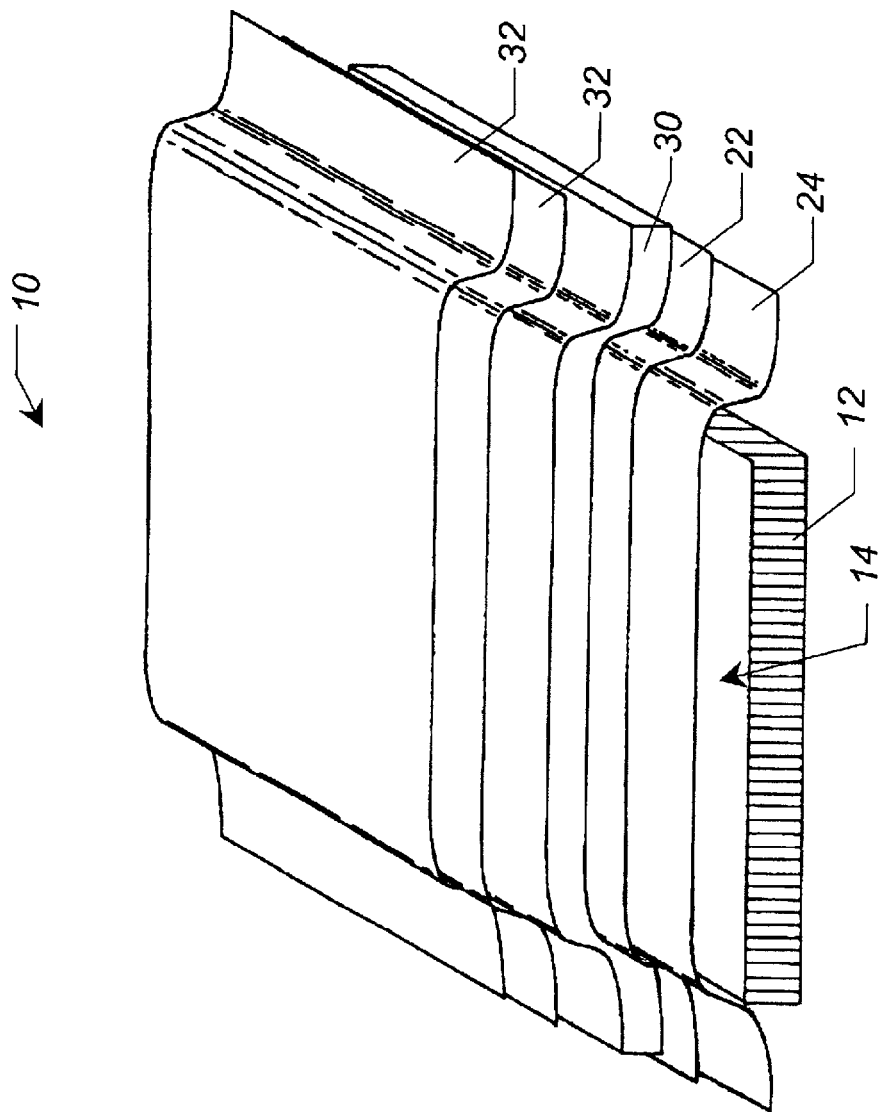


FIG. 3

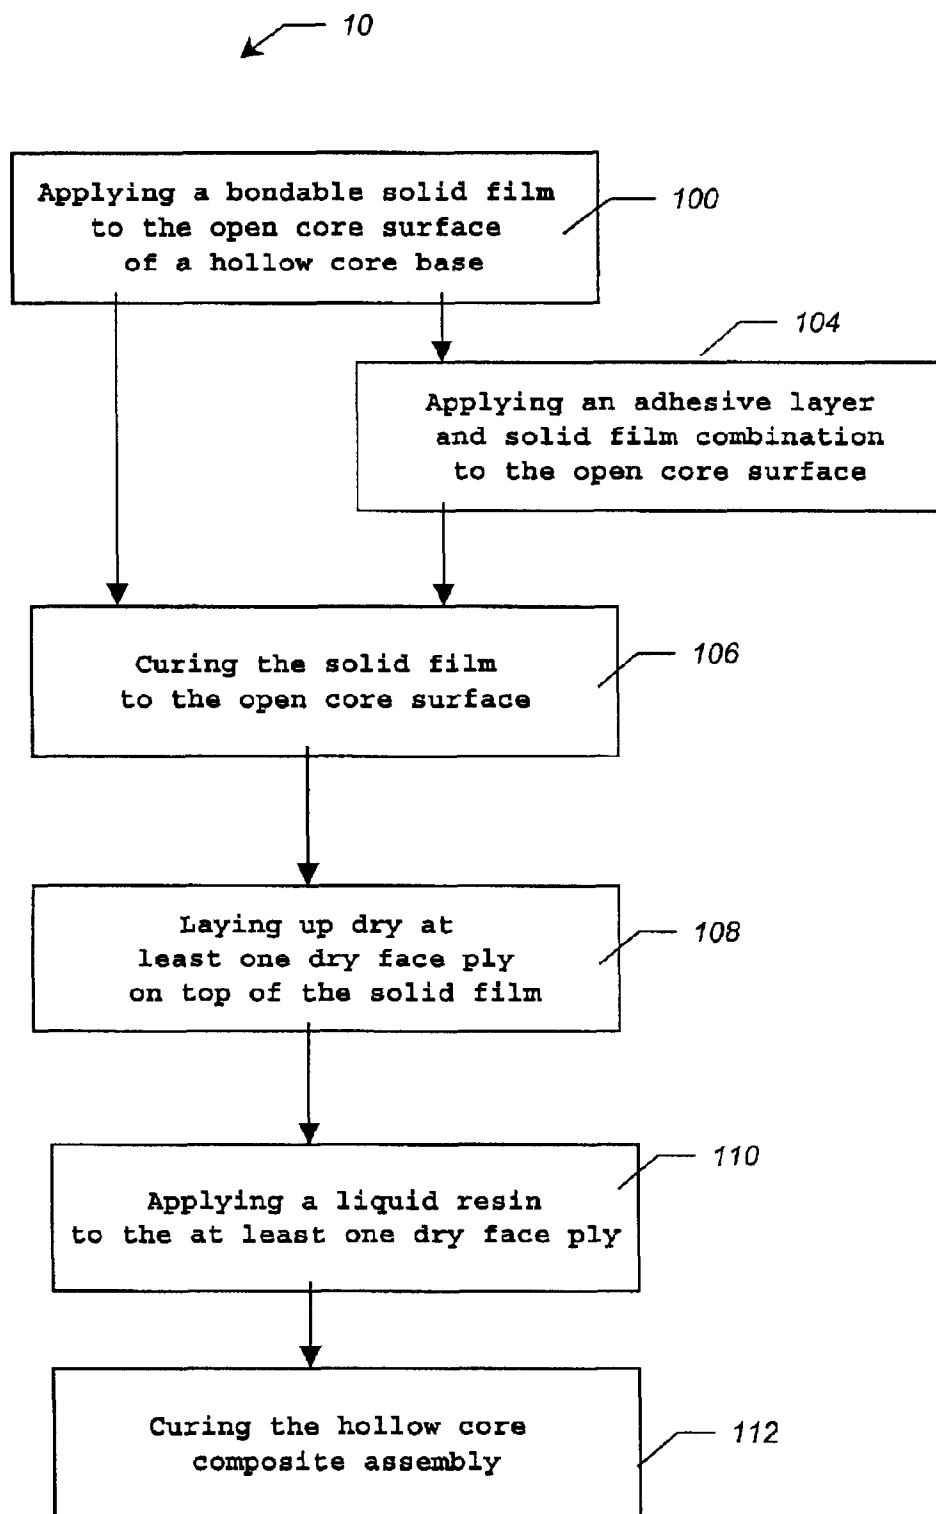


FIG. 4

1

LIQUID MOLDED HOLLOW CELL CORE COMPOSITE ARTICLES

CROSS-REFERENCE TO RELATED APPLICATIONS

This is one of two related applications being filed on the same day. The second is entitled Liquid Molded Hollow Cell Core Composite Articles filed on Oct. 30, 2001, Ser. No. 10/012,664 (01-101/009783 BOE 0278 PA).

"GOVERNMENT INTEREST"

The invention described herein was made in the performance of work under NASA Contract No. NCC8-190 and is subject to the provisions of Section 305 of the National Aeronautics and Space Act of 1958 (72 Stat. 435: 42 U.S.C. 2457).

TECHNICAL FIELD

The present invention relates generally to hollow cell core composite articles and more particularly to a liquid molded honeycomb core composite articles.

BACKGROUND OF THE INVENTION

The cornerstone of aeronautics, avionics, and spacecraft design has been the ability to design lightweight components that maintain structural strength and integrity. These characteristics play a crucial role not only in traditional design considerations such as flight capabilities and structural integrity, but also play a crucial role in the adaptability and commercial performance of a given craft design. Reduced weight and structural fortitude can play a significant role in fuel consumption, craft profile, and cargo and/or passenger capacity. The increase in profitability associated with the aforementioned factors, as well as a variety of others, has provided strong motivation for design advancements in the area of strength/weight improvement.

A significant advancement in the development of low weight/high strength structures was the development of the hollow cell cores, such as honeycomb cores. Hollow cell cores provide a high strength structural base while minimizing the negative effects of the weight associated with the core material by containing voids within the core material that provide for significant weight savings as compared to a solid component. The high strength/low weight characteristic of hollow cell cores has therefore resulted in the popularity of their use within the aeronautics industry as well as a variety of other industries.

Despite the popularity of hollow cell core materials, such as honeycomb cores, their use has not been suitable for certain manufacturing processes. Liquid molding processes, for example, can present problems when applied to hollow cell core materials. Liquid molding composite manufacturing processes, such as resin transfer molding, vacuum assisted resin infusion, vacuum infusion molding, and others, present fundamental concerns for the use of hollow cell core materials. When these processes are used, it is possible for the hollow cells to fill with liquid resin prior to curing. This can make the resulting structure resin rich, heavy, and generally undesirable. It would be highly desirable to have the ability to apply liquid molding approaches to hollow cell core materials without the concerns for compromised cells.

Numerous approaches have been developed in an attempt to solve the hollow cell core/liquid molding dilemma. Often, however, the resulting solutions add undesirable weight

2

and/or production costs to the resulting hollow core composite articles. One solution pre-processes the core to seal the cells with film adhesive, or film adhesive and prepreg, prior to liquid molding composite article fabrication to prevent liquid molding resin from penetrating the cells. Other processes include filling the hollow cells, for example, with a closed cell foam or material. This, however, often adds undesirable weight to the resulting article. Procured composite sheets autoclaved to the hollow cell core add additional weight and require a costly autoclaving process. Although a variety of other attempts are known to seal the hollow cell core, often these attempts result in undesirable weight increases, increases in the number of processing steps, and undesirable cost increases.

It would, therefore, be highly desirable to have a method for sealing hollow cell core material such that the hollow cell core material may be successfully used with known liquid molding approaches without penetration of the hollow cells by the liquid molding. In addition, it would be highly desirable for such a protective hollow cell core material to withstand liquid molding approaches without undesirable increases in weight or the requirement for costly manufacturing processes.

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a liquid molded hollow core composite assembly for use in low weight/high strength articles. It is a further object of the present invention to provide a liquid molded hollow core composite assembly that can be manufactured without resulting in undesirable increases in composite assembly weight or manufacturing time and cost.

In accordance with those and other objects of the present invention, a hollow core composite assembly is provided. The hollow core composite assembly includes a hollow core base including at least one open core surface. The hollow core composite assembly further includes a barrier material in contact with the open core surface to prevent penetration of the open core surface during liquid molding processes. The barrier material includes a solid film affixed to the open core surface through the use of an adhesive layer positioned between the solid film and the open core surface.

Other objects and features of the present invention will become apparent when viewed in light of the detailed description of the preferred embodiment when taken in conjunction with the attached drawings and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an exploded view illustration of an embodiment of a hollow core composite assembly in accordance with the present invention;

FIG. 2 is an exploded view of an alternate embodiment of a hollow core composite assembly in accordance with the present invention;

FIG. 3 is an exploded view of an alternate embodiment of a hollow core composite assembly in accordance with the present invention; and

FIG. 4 is a flow-chart illustration of a method of producing a hollow core composite assembly in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Referring now to FIG. 1, which is an illustration of an embodiment of a hollow core composite assembly 10 in

accordance with the present invention. The hollow core composite assembly **10** is intended for use within the aeronautics and spacecraft industry, although it is contemplated that the present invention may be utilized within a wide variety of fields. The hollow core composite assembly **10** provides a lightweight and cost effective method of providing structural assemblies for use in aircraft and spacecraft design.

The hollow core composite assembly **10** includes a hollow core base **12**. A wide variety of hollow core base **12** embodiments are known within the prior art. One such embodiment is a honeycomb core. The advantage of hollow core bases **12** is that they provide a low weight/high strength structure popular within the aeronautics field. A traditional disadvantage to such hollow core bases **12** is that they commonly contain at least one open core surface **14** where the hollow cores **16** are exposed. This open core surface **14** provides access to the hollow cores **16** and can provide a mechanism for liquid resin from the resin transfer molding process or vacuum assisted resin transfer molding process, to penetrate the hollow core base **12** and thereby suffer losses to its weight benefits. Although it is possible for a hollow core base **12** to have a single open core surface **14**, commonly a hollow core base **12** will have an upper open core surface **18** and a lower open core surface **20**.

The present invention seals and protects the open core surfaces **14** through the use of a bondable solid film **22** applied to the open cores surfaces **14**. A variety of bondable solid films **22** are contemplated by the present invention. One embodiment contemplates the use of a polysulphone (PSU) film. Other embodiments include, but are not limited to, bondable solid films **22** such as forms of, polyethyleneterephthalate (PET), nylon, thermoplastic polymer materials, metal foils, thermoset film materials, and urethane film materials. The primary characteristic of the solid bondable film **22** is to be impervious to penetration of the liquid resin of choice in the composite liquid molding process (such as vinyl ester, polyester epoxies, phenolics, cyanate esters, etc.) and bondable to the hollow core base **12** with or without the addition of an adhesive. The solid bondable film **22** provides a barrier to prevent subsequent liquid molding materials from penetrating the hollow cores **16** and thereby compromising the integrity of the hollow core composite assembly **10**.

One novel embodiment contemplates the use of polyetherketoneketone (PEKK) as the solid bondable film **22**. The use of PEKK provides a variety of advantages over many films when the hollow core composite assembly **10** is for use in unique applications. One advantage, is that the PEKK film has a relatively low dielectric constant. This can be an important factor when the hollow core composite assembly **10** is intended for use within low observable aircraft. The low dielectric constant can be advantageous to designs wherein low radar profile or radar invisibility is desired. The use of PEKK also provides the advantage of providing a solid bondable film **22** with improved bonding characteristics over many solid films. This can improve and simplify the manufacturing process as well as improve the integrity of the resulting composite. Although the PEKK film **22** may be formed in a variety of dimensions, one embodiment contemplates the use of a 1.1 millimeter film.

The hollow core composite assembly **10** can further include an adhesive layer **24** positioned between the solid bondable film **22** and the open core surface **14**. The adhesive layer **24**, such as an adhesive film, can be utilized to assist the bonding of the solid bondable film **22** to the hollow core base **12**. Although a variety of adhesive layers **24** are

contemplated, one embodiment contemplates the use of FM300 film adhesive. Other contemplated adhesives **24** include, but are not limited to, thermoplastic adhesive, hot melt adhesive, epoxy paste, BMI paste, and cyanate ester paste adhesives. It is envisioned that the solid bondable film **22** and the adhesive layer **24** are attached to the hollow core composite assembly **10** as part of the composite article perform. The thermal cycle to enhance the bonding characteristic of the solid bondable film **22** to the open core surface **14** (with or without the presence of the adhesive layer **24**) can be included in the single processing cycle for the hollow core composite assembly **10** and thereby lower processing costs and cycle time. It should be understood, however, that the solid bondable film **22** may be bonded to the hollow core base **12** prior to the composite article processing cycle as a separate processing step such as pre-curing. Pre-curing refers to curing the chemically active material of a detail/subassembly prior to a future cure of a more complete assembly. In one embodiment of the present invention, the hollow core base **12** and bondable solid film **22** can be "pre-cured" prior to a liquid molding operation. During a liquid molding operation the injection or infused resin would then be cured.

In an alternate novel embodiment, illustrated in FIG. 2, the present invention can further include at least one outer adhesive film **26** applied to the outer surface **28** of the solid bondable film **22**. A distinct and novel aspect of this embodiment, is that it can assist in improving the bondable outer surface **28** of the solid bondable film **22** in order to ensure an improved hollow core composite assembly **10** when subjected to liquid molding techniques. Prior processes often required specialized surface preparation or coatings to insure that the liquid molding techniques securely bonded to the hollow core composite assembly **10**. These specialized preparations could undesirably increase the cost, process steps, and time of manufacture. The present embodiment provides a relatively quick and efficient way of improving the bondable outer surface **28** of the solid bondable film **22** without the need for expensive and time consuming processes. It may also serve to increase the range of solid bondable films **22** available for a given application.

Referring now to FIG. 3, the present invention can further include at least one dry face ply **30** laid up dry and placed on top of the solid bondable film **22**. Although a single dry face ply **30** can be used, it is contemplated that a plurality of dry face plies **30** are to be used to result in a composite sandwich panel of face skins. The face ply **30** (reinforcing ply, reinforcement, etc.) of the resulting composite article may consist of carbon fiber, fiberglass, Spectra, Kevlar fabric or other high performance reinforcement material. Although a single dry face ply **30** can be used, it is contemplated that low resin content or tackified ply could be used. This type of reinforcement material and style of reinforcement form (weave, mat, yarn or tow) is dependent on the design and function of the resulting composite article and may be infinitely tailored to meet the desired need. A wide variety of dry face plies **30** are well known in the industry and can be used in combination to provide structural surfaces with unique properties. One advantage of using a plurality of dry face plies **30** is that the hollow core composite assembly **10** can be quickly and simply assembled and a single liquid molding process and all of the subsequent thermal processing, bonding steps and resin infusion can be performed simultaneously. This provides significant production cost and time advantages over many prior art methods.

Finally, liquid resin **32** is applied to the dry face ply **30**, or plies, and the hollow core composite assembly **10** is cured. The liquid resin **32** wets out the dry plies **30**. A single

5

liquid resin **32** may be applied, or a plurality of liquid resins **32** may be utilized. Once cured, the resulting assembly **10** becomes a sandwich panel of face skins surrounding a hollow core base **12**. The liquid resin **32** is contemplated to be applied in any of a variety of known fashions. In one embodiment, it is contemplated that the liquid resin **32** is applied using a resin transfer molding process. In alternate embodiments, however, the liquid resin **32** can be applied using a variety of processes including, but not limited to, vacuum assisted resin transfer molding, vacuum infusion molding processes, etc. The liquid resin **32** may be applied to the composite article in a variety of means such as wet lay-up, resin transfer molding processes, SCRIMP, vacuum assisted resin transfer molding processes, vacuum infusion molding processes, etc. For each of the named processes, the liquid molding resin **32** is selected based on the process method, composite article end item requirements, composite article use and other factors. After the application of the liquid resin **32**, the resin is allowed to set (or cure) to a rigid form permitting the composite article to be removed from the tool or mold. The method of cure is dependent upon the selected liquid resin **32**. Many types of polyester resin commonly used in the marine industry cure at ambient temperatures (70 deg F.) in a given amount of time, while many aerospace grade structural epoxy resins cure at 350 deg F. Each type of resin has varying cure requirements. After removal of the composite article from the tool or mold, it may undergo a post cure to enhance the resin properties or the composite article.

Referring now to FIG. 4, which is an embodiment of a method of producing a hollow core composite assembly in accordance with the present invention. The method includes applying a bondable solid film to the open core surface of a hollow core base **100**. In one embodiment this includes applying an adhesive layer and solid film combination to the open core surface **104**. The method may further optionally include curing the solid film to the open core surface **106**. In an alternate embodiment, the solid film may be cured to the open core surface as part of a liquid molding process. The method may further include laying up dry at least one dry face ply on top of the solid film **108**. It is contemplated that the at least one dry face ply may include a plurality of dry face plies. A liquid resin is then applied to at least one dry face ply **110**. This may be accomplished in a single liquid resin application or may include a plurality of liquid resin applications. In addition, it is contemplated that the liquid resin ply may be applied in a variety of fashions including, but not limited to resin transfer molding, vacuum assisted resin transfer molding, and vacuum infusion molding process. Finally, the hollow core composite assembly is cured **112**. A variety of curing processes are contemplated by the present invention and may be used alone or in combination to effectuate curing base upon the curing requirements of the liquid resin, the adhesive film, and the hollow core base.

While particular embodiments of the invention have been shown and described, numerous variations and alternative embodiments will occur to those skilled in the art. Accordingly, it is intended that the invention be limited only in terms of the appended claims.

What is claimed is:

1. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

6

laying up dry at least one dry face ply on top of the solid film;

applying liquid resin to said at least one dry face ply; and curing the hollow core composite assembly.

2. A method of producing a hollow core composite assembly as described in claim 1, further comprising:

curing said uncured solid film to said open core surface by said applying at least one liquid resin layer.

3. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

wherein said uncured solid film comprises polyetherketonekaone.

4. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

wherein said uncured solid film comprises a polysuphone film.

5. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

wherein said uncured solid film comprises polyethylene-terephthalate.

6. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

wherein said uncured solid film is chosen from the group of nylon, thermoset film material, and urethane film materials.

7. A method of producing a hollow core composite assembly comprising:

applying a film adhesive to an open core surface of a hollow core base;

applying an uncured solid film to said open core surface;

applying at least one liquid resin layer to said uncured solid film using a resin molding process, said at least one solid film preventing said at least one liquid resin layer from penetrating said hollow core base;

applying an outer film adhesive to an outer surface of said uncured solid film.